


Himec 9905 BT

Twin boom platform lifter

TI 100020152 DATE 03.07.2012 PAGE 1/6

1450 1600 1750 m

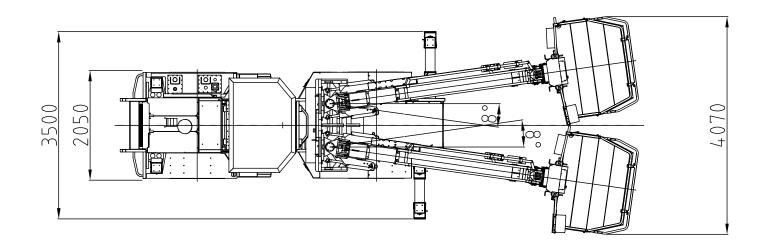





Himec 9905 BT

Twin boom platform lifter

TI 100020152 DATE 03.07.2012 PAGE 2/6

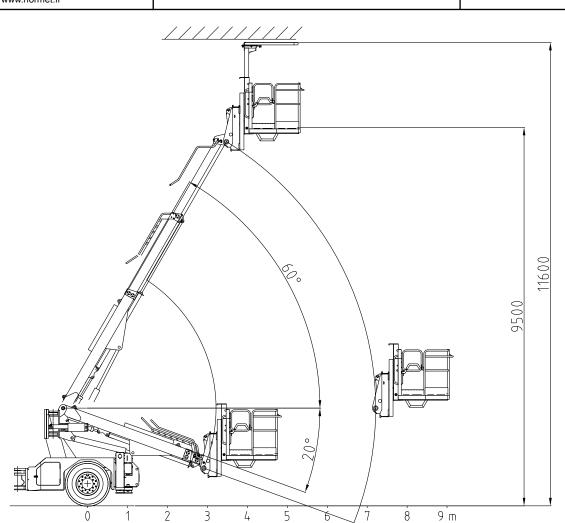

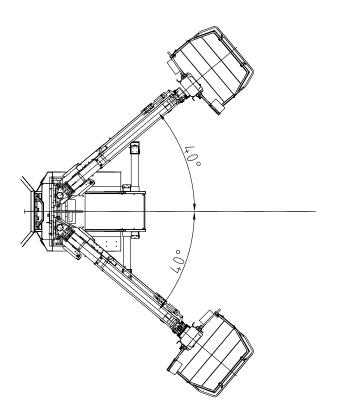




Himec 9905 BT

TI 10 DATE 03 PAGE 3

100020152 03.07.2012 3 / 6

Twin boom platform lifter

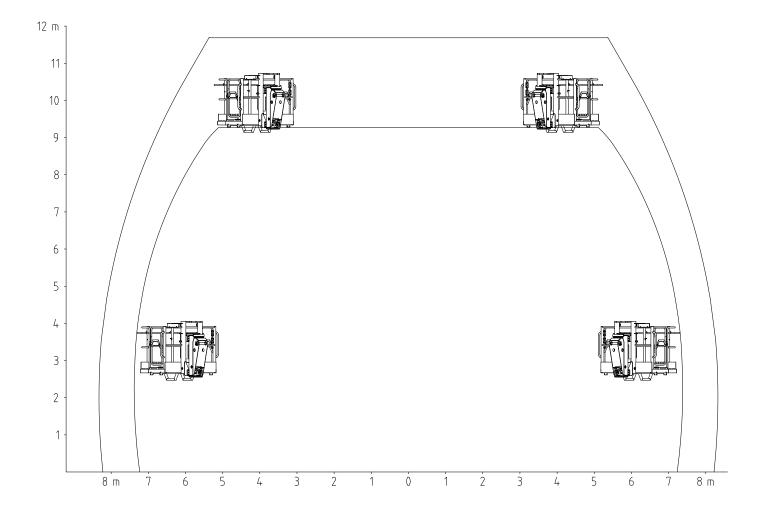





Himec 9905 BT

Twin boom platform lifter

TI 100020152 DATE 03.07.2012 PAGE 4/6

DIMENSIONS WITH OPTIONS

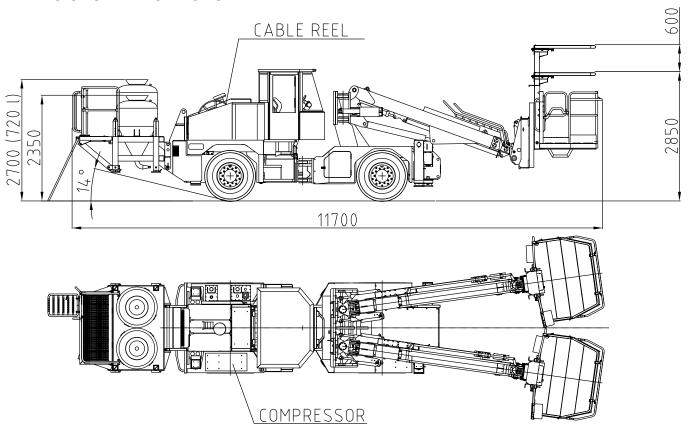

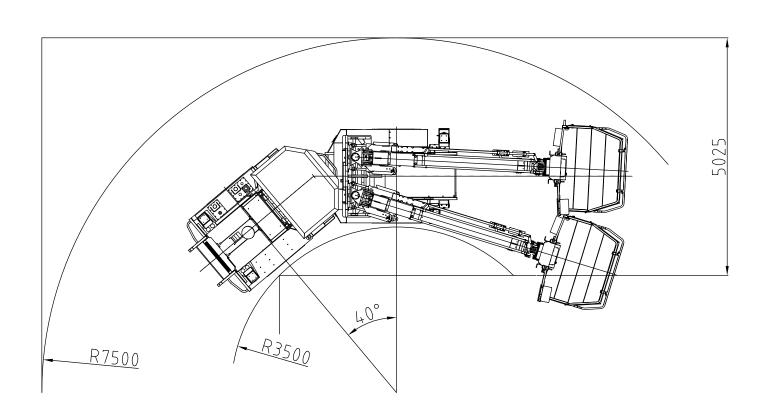



Himec 9905 BT

TI 100020152 DATE 03.07.2012 PAGE 5/6

Twin boom platform lifter

HIMEC 9905 BT is a self propelled twin boom unit suitable for lifting and installing works and charging of explosives in tunnells.	DIMENSIONS Length Width Height Wheel base Ground clearance Outer turning radius Inner turning radius Weight, max. total	9700 mm 2050/3500 mm 2900 mm 3350 mm 310 mm 7500 mm 3600 mm 19600 kg
NORMET TWINBOOM NBB3 Twinboom is suitable for charging, bolting and installing works. Boom controls are in the basket and down on the carrier. Each boom can be operated independently allowing several holes to be charged safely at the same time. Large coverage allows the whole face to be charged from one setup. Baskets can be equipped with FOPS tested safety canopy (EN ISO 3449).	Boom lift Boom slew Max. platform height Vertical working reach Lateral working reach Lifting capacity 500 kg = 2 pers.	16 m
SUPPORT LEGS One pair in front and one pair at rear, hydraulically operated, front pair with lateral extensions.		
WORKING LIGHTS	On baskets On carrier	4 x 70 W 4 x 70 W
SAFETY CANOPY over the drivers seat fulfills the European safety regulations. Driver's cabin is FOPS/ROPS tested		
CARRIER NC 98 is specially designed for underground use. Diesel engine with hydrodynamic transmission and 4-wheel drive gives max. tractive effort of 85 kN and max. speed of 25 km/h. Fully enclosed multidisc 2-circuit brakes and parking and emergency brake make operating reliable and safe in the harsh underground conditions.	Diesel engine Max. tractive effort Max. speed	96 kW 85 kN 25 km/h



Himec 9905 BT

Twin boom platform lifter

TI 100020152 DATE 03.07.2012 PAGE 6/6

LTC SERVICES:

SPARE PARTS

Spare parts package A: Available for 1000 h of use*. Include periodical service, most common wearing parts and most critical safety parts.

Spare parts package B: Available for 3000 h of use*. Include periodical service, most common wearing parts and most critical safety parts.

* Recommendations are based on average hours - can vary a lot depending on work site conditions.

TRAINING SERVICES

Available before delivery, at start up and after delivery

Product training:

Operation and Maintenance

NorSmart

Foundation of electrics, hydraulics

and mechanics

Audit

Process training:

Concrete spraying

Charging

Process audit

AUDIT SERVICES

To improve performance of the machines
To improve the performance of your processes

To help improve the quality of maintenance operations

SERVICE CONTRACTS

Spare parts supply programmes Scheduled inspection programmes

Supervision programmes

Periodic maintenance programmes

Machine usage programmes

LINK ONE

Link One electronic spare part manuals

WARRANTY SERVICES

Extended warranty

OPTIONAL EQUIPMENT:

Enclosed cabin for NC98 (ROPS/FOPS)

Particle filter for Deutz TCD 2012 L04 96kW

Xenon working lights on cabin (2 + 2) 35W

LED driving lights (4 + 2 pcs)

LED working lights on cabin (2 + 2 pcs)

ADDITIONAL EQUIPMENT:

Electro hydraulic drive 15kW:

- 400 V / 50 Hz with 50 m cable and hydr. reel
- 440 V / 50 Hz with 50 m cable hydr. reel
- 690 V / 50 Hz with 50 m cable hydr. reel
- 1000 V / 50 Hz with 50 m cable hydr. reel

Hydraulic driven high pressure washer 180 bar / 30 L

CD/Radio system (enclosed cabin)

Cabin heating (enclosed cabin)

Air conditioning (enclosed cabin)

Safety bar

Safety roof with hydraulic lift

Safety roof with hydraulic lift and slide

Fogmaker extinguishing system (manual)

Fogmaker extinguishing system (automatic)

Ansul extinguishing system (manual)

Ansul extinguishing system (automatic)

Tempus manually actuated (Non CE)

Lubrication system for carrier and NBB booms (Lincoln)

Hydraulically driven compressor 5 m3/min

1 extra hand held fire extinguisher (12 kg)

1 extra rotating beacon amber

1 extra rotating beacon red

1 extra rotating beacon blue

1 extra strobe light white

Toolbox and maintenance tools

2 pcs wheel chocks with brackets

Spare wheel

Rack for equipment and tools

Text labels in:

Fin / Por /GB / Swe / Rus / Nor / Ger / Fra / Spa / Ita