



Himec 9910 B Rex

Single boom extendable platform lifter

TI 100019245 DATE 03.07.2012 PAGE 1/6

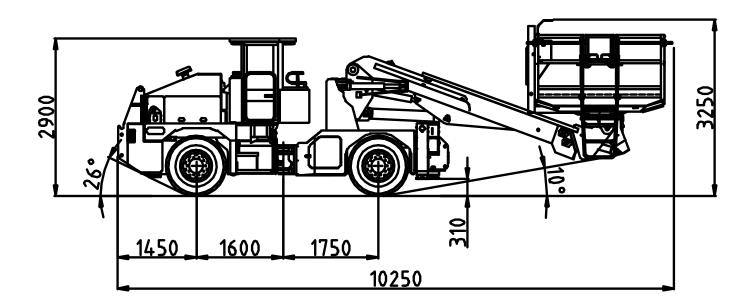

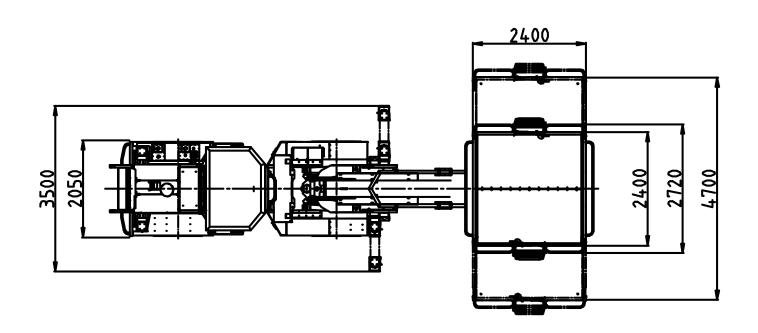





Himec 9910 B Rex

Single boom extendable platform lifter

TI 100019245 DATE 03.07.2012 PAGE 2/6

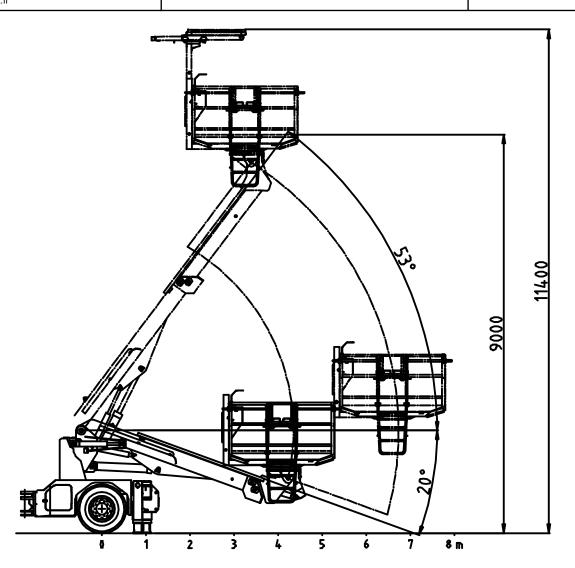

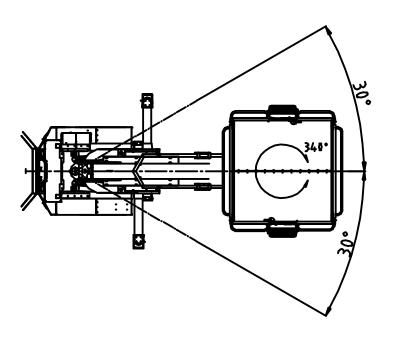




Himec 9910 B Rex

Single boom extendable platform lifter

TI 100019245 DATE 03.07.2012 PAGE 3/6

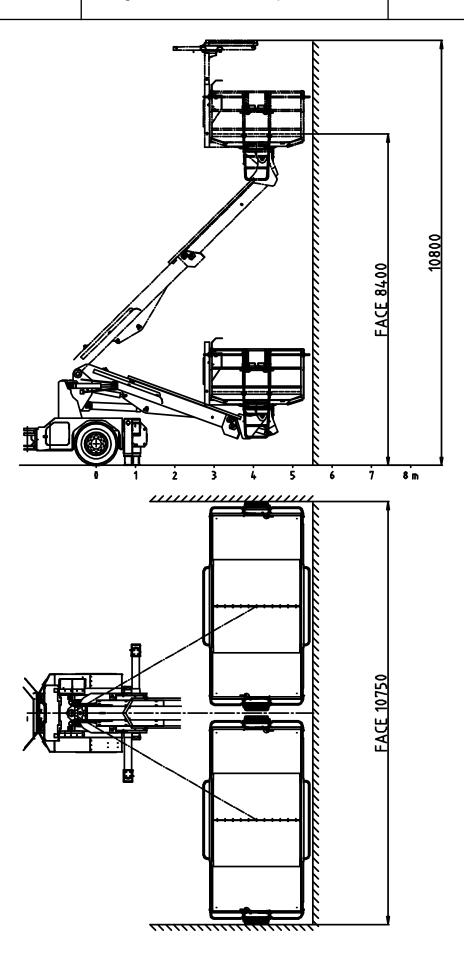




Himec 9910 B Rex


Single boom extendable platform lifter

ΤI 100019245 DATE 03.07.2012

PAGE 4/6

DIMENSIONS WITH OPTIONS

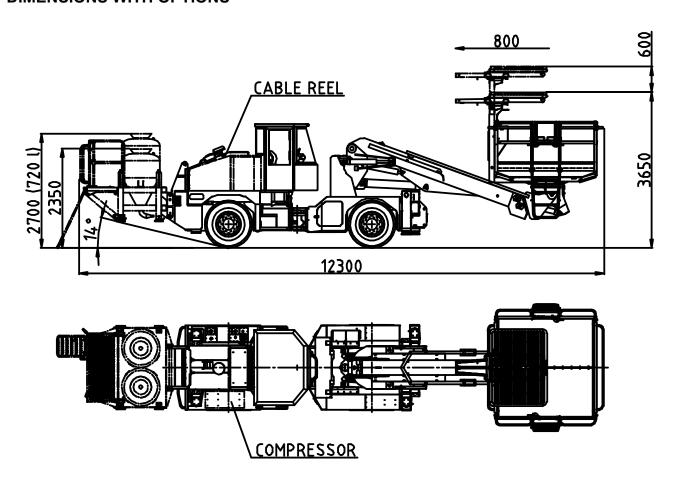

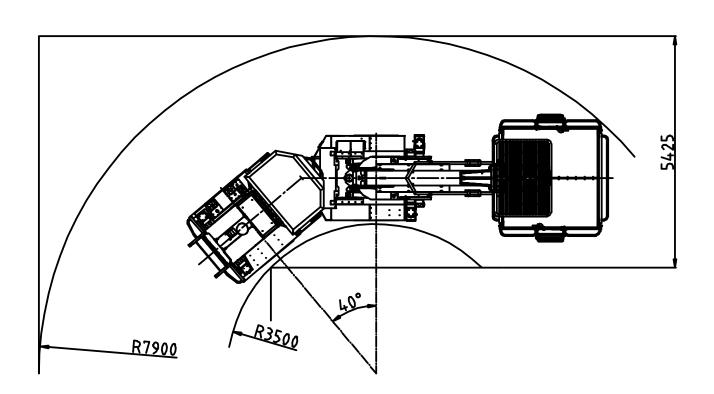



Himec 9910 B Rex

TI 100019245 DATE 03.07.2012 PAGE 5/6

Single boom extendable platform lifter

HIMEC 9910 B REX is a self propelled diesel driven 1-boom lifting unit suitable for charging of explosives, lifting and installing works in tunnelling.	DIMENSIONS Length Width Height Wheel base Ground clearance Outer turning radius Inner turning radius Weight, operating	10250 mm 2050/3050 mm 2900 mm 3350 mm 310 mm 7900 mm 3500 mm 19700 kg
NORMET SUPERBOOM NSB900 is a heavy duty multipurpose boom suitable for charging, scaling, spraying of concrete, bolting and installing works. Different work platforms and net & roof support installing equipment are available. Boom is controlled from the platform and from the carrier. Basket can be equipped with FOPS tested safety canopy (EN ISO 3449).	Boom lift Boom slew	- 20° + 53° +/- 30°
WORKING PLATFORM REX is a hydraulically extentable platform with patterned plate working surface, safety railings and boom and platform controls on board. Automatic horizontal holding system and platform rotating provide good working flexibility and applicability for most various lifting works.	Working reach - roof Working reach - face Platform rotation Platform size - base - extended Lifting capacity	11,4 m 10,8 m 340° 2,40 m x 2,40 m 2,40 m x 4,70 m 1000 kg
WORKING LIGHTS	2 x 70 W on the work platform 4 x 70 W on the carrier	
SUPPORT LEGS One pair in front and one pair at rear, hydraulically operated, front pair with lateral extensions.		
SAFETY CANOPY over the drivers seat fulfills the European safety regulations. Driver's cabin is FOPS/ROPS tested.		
CARRIER NC 98 is specially designed for underground use. Diesel engine with hydro-dynamic transmission and 4-wheel drive gives max. speed of 25 km/h. Fully enclosed multidisc 2-circuit brakes and parking and emergency brake make operating reliable and safe in the harsh underground conditions.	Diesel engine Max. tractive effort Max. speed	96 kW 85 kN 25 km/h



Himec 9910 B Rex

TI 100019245 DATE 03.07.2012 PAGE 6/6

Single boom extendable platform lifter

OPTIONAL EQUIPMENT

Enclosed cabin for NC98 (ROPS/FOPS)

Particle filter for Deutz TCD 2012 L04 96kW

Xenon working lights on cabin (2 + 2) 35W

LED driving lights (4 + 2 pcs)

LED working lights on cabin (2 + 2 pcs)

ADDITIONAL EQUIPMENT

Electro hydraulic drive 15kW:

- 400 V / 50 Hz with 50 m cable and hydr. reel
- 440 V / 50 Hz with 50 m cable hydr. reel
- 690 V / 50 Hz with 50 m cable hydr. reel
- 1000 V / 50 Hz with 50 m cable hydr. reel

Hydraulic driven high pressure washer 180 bar / 30 L

CD/Radio system (enclosed cabin)

Cabin heating (enclosed cabin)

Air conditioning (enclosed cabin)

Fogmaker extinguishing system (manual)

Fogmaker extinguishing system (automatic)

Ansul extinguishing system (manual)

Ansul extinguishing system (automatic)

Tempus manually actuated (Non CE)

Lubrication system for carrier and NSB boom (Lincoln)

Hydraulically driven compressor 5 m3/min

Sliding safety roof for REX basket

1 extra hand held fire extinguisher (12 kg)

1 extra rotating beacon amber

1 extra rotating beacon red

1 extra rotating beacon blue

1 extra strobe light white

Toolbox and maintenance tools

2 pcs wheel chocks with brackets

Spare wheel

Rack for equipment and tools

Text labels in:

Fin / Por /GB / Swe / Rus / Nor / Ger / Fra / Spa / Ita

LTC SERVICES

SPARE PARTS

Spare parts package A: Available for 1000 h of use*. Include periodical service, most common wearing parts and most critical safety parts.

Spare parts package B: Available for 3000 h of use*. Include periodical service, most common wearing parts and most critical safety parts.

* Recommendations are based on average hours - can vary a lot depending on work site conditions.

TRAINING SERVICES

Available before delivery, at start up and after delivery

Product training:

Operation and Maintenance

NorSmart

Foundation of electrics, hydraulics

and mechanics

Audit

Process training:

Concrete spraying

Charging

Process audit

AUDIT SERVICES

To improve performance of the machines
To improve the performance of your processes

To help improve the quality of maintenance operations

SERVICE CONTRACTS

Spare parts supply programmes

Scheduled inspection programmes Supervision programmes

Periodic maintenance programmes

Machine usage programmes

LINK ONE

Link One electronic spare part manuals

WARRANTY SERVICES

Extended warranty